




**CHARACTER
COLLECTION**

—by Somerset™—

Hickory Species in beautiful Colors & Low Gloss Finish Naturally Complements the Character of the Wood!

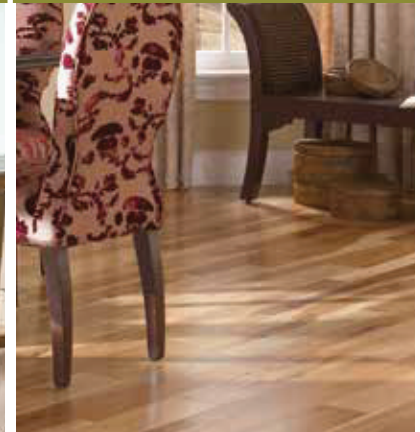

The Character Collection features the full range of what Mother Nature includes in the wood, including knots, mineral, light and dark variations, etc. Product images cannot capture the full range of variation—in fact, every single floor is one-of-a-kind!



NATURAL KNOTS, MARKINGS, AND VARIATIONS IN GRAIN AND COLOR—COMPLEMENTED BY A LOW GLOSS FINISH—GIVES ANY SPACE REAL CHARACTER.



S SOLID
3/4" thick, random lengths up to 6-1/2'
WIDTHS: 3-1/4", 4", 5"

S SOLIDPLUS® ENGINEERED
1/2" thick, 3mm thick solid sawn wear layer, 8-ply, random lengths up to 6-1/2'
WIDTHS: 3-1/4", 5"



PRODUCT SPECIFICATION SHEET

05/26

CHARACTER: SOLID



Product:	Somerset Character Collection Solid Hardwood Flooring					
Species:	Hickory					
Grade:	Proprietary Somerset character grade that will include, but is not limited to, small, sound open knots; mineral; worm holes; heartwood; sapwood; and burls.					
Dimensions:	Thickness: 3/4"* Widths: 3-1/4", 4", 5" Lengths: Random from 10" up to 6-1/2' <small>*Nominal</small>					
Construction:	Traditional 3/4" solid construction produced from domestically grown and harvested Appalachian hardwood. Material conforms to Appalachian Hardwood Manufacturers, Inc.'s Verified Sustainable Seal (www.appalachianwood.org). Product is also affiliated with the National Wood Flooring Association.					
Profile:	Eased Edge, Eased End					
Finish:	Ultimate™ Urethane Finish—UV Cured Aluminum Oxide, Abrasion Resistant Finish					
Colors:		3/4" Width	4" Width	5" Width	Species	Finish
	Hickory Fawn	CP314FABLG	CP41FABLG	CP51FABLG	Hickory	Low Gloss
	Hickory Linen	CP314LNBLG	CP41LNBLG	CP51LNBLG	Hickory	Low Gloss
	Hickory Driftwood	CP314DWBLG	CP41DWBLG	CP51DWBLG	Hickory	Low Gloss
	Hickory Shale	CP314SHBLG	CP41SHBLG	CP51SHBLG	Hickory	Low Gloss
	Hickory Saddle	CP314HSBLG	CP41HSBLG	CP51HSBLG	Hickory	Low Gloss
	Hickory Natural	CP314HCBLG	CP41HCBLG	CP51HCBLG	Hickory	Low Gloss
	Hickory Ember	CP314HEBLG	CP41HEBLG	CP51HEBLG	Hickory	Low Gloss
Gloss Level:	Low Gloss					
Janka Hardness:	Species	Lbs				
	Hickory	1820				
	<i>Reference (Red Oak)</i>	1290				
MSDS:	Not required for cured finish, MSDS for Wood Dust available on request					
Installation:	Nail down or staple, on or above grade. (NWFA Installation Guidelines and Methods, revised: March, 2019.) Installation guidelines are available at www.somersetfloors.com					
Maintenance:	Somerset Ultimate™ Wood Floor Cleaner (www.somersetfloors.com)					
Limited Warranty:	50-Year Finish Wear; Lifetime Structural Integrity (www.somersetfloors.com)					
Molding:	Quarter Round, Stair Nose, Threshold, T-Mold, and Reducer					

CHARACTER: **SOLIDPLUS**® ENGINEERED



Product:	Somerset Character Collection Solid Plus Engineered Hardwood Flooring				
Species:	Hickory				
Grade:	Proprietary Somerset character grade that will include, but is not limited to, small, sound open knots; mineral; worm holes; heartwood; sapwood; and burls.				
Dimensions:	Thickness: 1/2"*; 3mm* thick solid dry sawn wear layer Widths: 3-1/4", 5" Lengths: Random from 10" up to 6-1/2' <small>*Nominal</small>				
Construction:	8-ply cross-grain engineered construction; 7-ply hardwood core.				
Profile:	Eased Edge, Eased End				
Finish:	Ultimate™ Urethane Finish—UV Cured Aluminum Oxide, Abrasion Resistant Finish				
Colors:		3/4" Width	5" Width	Wear Layer Species	Finish
	Hickory Fawn	EP314FAELG	EP512FAELG	Hickory	Low Gloss
	Hickory Linen	EP314LNELG	EP512LNELG	Hickory	Low Gloss
	Hickory Driftwood	EP314DWELG	EP512DWELG	Hickory	Low Gloss
	Hickory Shale	EP314SHELG	EP512SHELG	Hickory	Low Gloss
	Hickory Saddle	EP314HSELG	EP512HSELG	Hickory	Low Gloss
	Hickory Natural	EP314CHELG	EP512CHELG	Hickory	Low Gloss
	Hickory Ember	EP314HEELG	EP512HEELG	Hickory	Low Gloss
Gloss Level:	Low Gloss				
Janka Hardness:	Species	Lbs			
	Hickory	1820			
	<i>Reference (Red Oak)</i>	1290			
MSDS:	Not required for cured finish, MSDS for Wood Dust available on request				
Formaldehyde Emissions:	ASTM D6007; BQL (below quantification limit—.008ppm) TSCA Title VI Compliant				
Critical Radiant Flux (CRF):	ASTM E648 (0.33 critical radial flux)				
Installation:	Nail, staple, glue down, or float on, above or below grade (ground level). (NWFA Installation Guidelines and Methods, revised: March, 2019.) Installation guidelines are available at www.somersetfloors.com				
Maintenance:	Somerset Ultimate™ Wood Floor Cleaner (www.somersetfloors.com)				
Limited Warranty:	50-Year Finish Wear; Lifetime Structural Integrity (www.somersetfloors.com)				
Molding:	Quarter Round, Stair Nose, Threshold, T-Mold, and Reducer				