


**WIDE PLANK
COLLECTION**
— by Somerset™ —

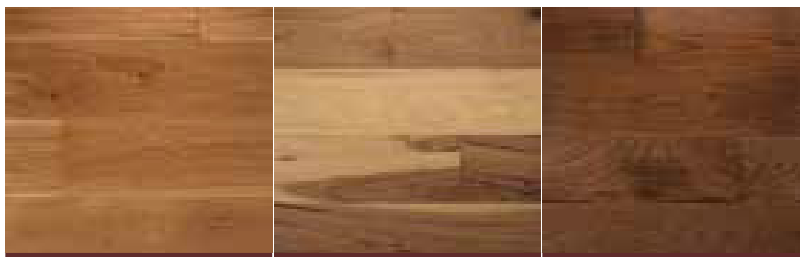

NATURAL WHITE OAK

White Oak

HICKORY TOAST

Hickory

HICKORY SADDLE

Hickory

ULTRA-WIDE PLANK FLOORING
IN OAK AND HICKORY
MAKES A BIG DESIGN STATEMENT



SOLIDPLUS® ENGINEERED
1/2" thick, 3mm thick solid sawn wear
layer, 8-ply, random lengths up to 6-1/2'
WIDTHS: 6", 7"



PRODUCT SPECIFICATION SHEET

05/15

WIDE PLANK: **SOLIDPLUS**® ENGINEERED



Product:	Somerset Wide Plank Collection Solid Plus Engineered Hardwood Flooring		
Species:	Hickory, White Oak (Somerset does not mix species)		
Grade:	Proprietary Somerset grade		
Dimensions:	Thickness: 1/2"*; 3mm* thick solid dry sawn wear layer Widths: 6", 7" Lengths: Random from 10" up to 6-1/2' <small>*Nominal</small>		
Construction:	Multi ply cross-grained engineered construction; premium hardwood plywood core		
Profile:	Eased Edge, Eased End		
Finish:	Ultimate™ Urethane Finish—UV Cured Aluminum Oxide, Abrasion Resistant Finish		
Colors:	6" Width	7" Width	Wear Layer Species
	Natural White Oak	EPWWON7E	White Oak
	Hickory Toast	EPWHTO6E	Hickory
	Hickory Saddle	EPWHTO6E	Hickory
Gloss Level:	Low Gloss		
Janka Hardness:	Species	Lbs	
	Hickory	1820	
	White Oak	1360	
MSDS:	Not required for cured finish, MSDS for Wood Dust available on request		
Formaldehyde Emmissions:	ASTM D6007; BQL (below quantification limit—.008ppm) TSCA Title VI Compliant		
Critical Radiant Flux (CRF):	ASTM E648 (0.33 critical radial flux)		
Installation:	Nail, staple, glue down, or float on, above or below grade (ground level). (NWFA Installation Guidelines and Methods, revised: March, 2019.) Installation guidelines are available at www.somersetfloors.com		
Maintenance:	Somerset Ultimate™ Wood Floor Cleaner (www.somersetfloors.com)		
Limited Warranty:	50-Year Finish Wear; Lifetime Structural Integrity (www.somersetfloors.com)		
Molding:	Quarter Round, Stair Nose, Threshold, T-Mold, and Reducer		